

Medium Pressure Needle Valve

SHNV20 Series - 20,000 psi (1380 bar)

Features

- Pressures to 20,000 psi (1,380 bar)
- Non-rotating stem tips.
- Available sizes are 1/4", 3/8", 9/16", 3/4" and 1".
- Type 316 stainless steel high tensile bodies.
- Choice of VEE or Regulating stem tip.
- PTFE(Teflon) encapsulated packing provides dependable stem and body sealing.

Specifications


- Maximum Working Pressure rating: 20,000psig (1,380bar) @72 F°(22 C°)
- Temperature rating: 0 to 450 F°(-17.8 to 232 C°) with Teflon packing and up to 1200 F°(648 C°) with optional grafoil packing.

Technical Data


Valve Flow Coefficient

Tube O.D In.	Connection	Orifice In. (mm)	*Cv	Pressure / Temperature Rating psi (bar) @72 F°(22 C°)
1/4"	MP4	0.125" (3.18)	0.31	20,000 psi (1,380 bar)
3/8"	MP6	0.219" (5.56)	0.75	20,000 psi (1,380 bar)
9/16"	MP9	0.312" (7.92)	1.75	20,000 psi (1,380 bar)
3/4"	MP12	0.438" (11.13)	2.80	20,000 psi (1,380 bar)
1"	MP16	0.562" (14.27)	5.20	20,000 psi (1,380 bar)

*Cv values listed are for 2-way straight pattern valves.
For 2-way angle pattern valves, increase Cv value by 50%.

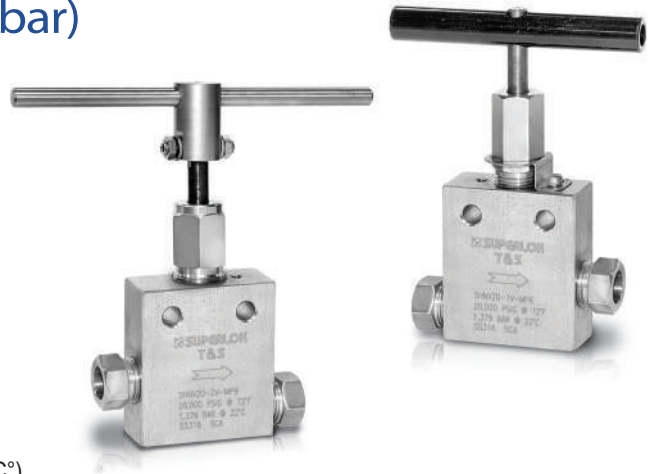

Coefficient Curves (Cv)

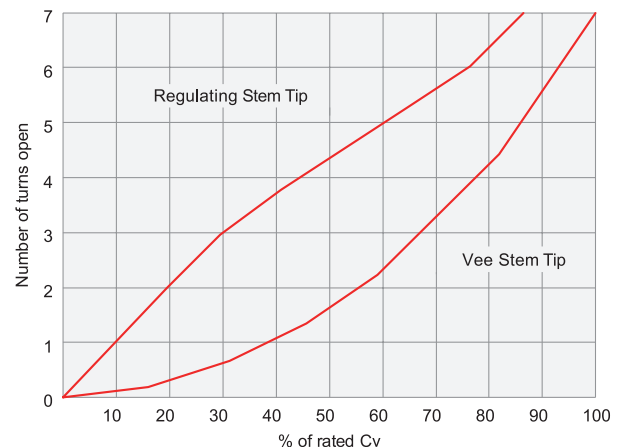

Ordering Information

Example : **SHNV 20 - 1V - MP9 - GR - SS**

1
2
3
4
5

1. Body Pattern

- 1 : 2-way straight
- 2 : 2-way angle
- 3 : 3-way, two pressure connections
- 4 : 3-way, one pressure connection
- 5 : 3-way, two stem connection valve
- 6 : Replaceable seat valve

2. Stem Type

- V : Vee stem
R : Regulating stem

3. Connection Size & Type

Size (inch)	1/4	3/8	1/2	3/4	1
Medium Pressure	MP4	MP6	MP9	MP12	MP16

4. Packing Material


- Nil : PTFE (Standard)
GR : Grafoil

5. Body Material

- SS : Stainless Steel


Specifications

Two Way Straight Valves




Part Number	Tube O.D	Orifice	Dimensions, inch(mm)								Thick-ness
			D	E	F	G	H	J	K	L	
SHNV20-1V-MP4	1/4 (6.35)	0.125 (3.18)	4.69 (119.13)	2.00 (50.80)	0.38 (9.65)	0.81 (20.57)	2.00 (50.80)	0.38 (9.65)	1.24 (31.50)	0.22 (5.59)	0.75 (19.05)
SHNV20-1V-MP6	3/8 (9.53)	0.219 (5.56)	4.69 (119.13)	2.00 (50.80)	0.38 (9.65)	0.81 (20.57)	2.00 (50.80)	0.38 (9.65)	1.24 (31.50)	0.22 (5.59)	0.75 (19.05)
SHNV20-1V-MP9	9/16 (14.29)	0.312 (7.92)	5.93 (150.86)	2.50 (63.50)	0.50 (12.70)	1.13 (28.70)	2.88 (73.15)	0.50 (12.70)	1.38 (35.05)	0.34 (8.64)	1.00 (25.40)
SHNV20-1V-MP12	3/4 (19.05)	0.438 (11.13)	7.00 (177.80)	3.00 (76.20)	0.75 (19.05)	1.50 (38.10)	3.75 (95.25)	0.63 (16.00)	1.76 (44.70)	0.44 (11.18)	1.38 (35.05)
SHNV20-1V-MP16	1 (25.4)	0.562 (14.27)	9.00 (228.60)	4.12 (104.65)	0.88 (22.35)	1.82 (46.22)	4.63 (117.60)	1.13 (28.70)	2.50 (63.50)	0.56 (14.22)	1.75 (44.45)

Two Way Angle Valves



Part Number	Tube O.D	Orifice	Dimensions, inch(mm)							Thick-ness
			D	E	G	H	J	K	L	
SHNV20-2V-MP4	1/4 (6.35)	0.125 (3.18)	4.81 (122.25)	2.00 (50.80)	1.25 (31.75)	2.44 (61.90)	0.38 (9.65)	1.24 (31.50)	0.22 (5.59)	0.75 (19.05)
SHNV20-2V-MP6	3/8 (9.53)	0.219 (5.56)	4.81 (122.25)	2.00 (50.80)	1.25 (31.75)	2.44 (61.90)	0.38 (9.65)	1.24 (31.50)	0.22 (5.59)	0.75 (19.05)
SHNV20-2V-MP9	9/16 (14.29)	0.312 (7.92)	6.43 (163.56)	2.50 (63.50)	1.63 (41.40)	3.38 (85.85)	0.50 (12.70)	1.38 (35.05)	0.34 (8.64)	1.00 (25.40)
SHNV20-2V-MP12	3/4 (19.05)	0.438 (11.13)	7.50 (190.50)	3.00 (76.20)	2.00 (50.80)	4.25 (107.95)	0.63 (16.00)	1.76 (44.70)	0.44 (11.18)	1.38 (35.05)
SHNV20-2V-MP16	1 (25.4)	0.562 (14.27)	9.00 (228.60)	4.12 (104.65)	2.31 (58.67)	5.12 (130.05)	1.13 (28.70)	2.50 (63.50)	0.56 (14.22)	1.75 (44.45)

Three Way Valves / Two Pressure Connections




Part Number	Tube O.D	Orifice	Dimensions, inch(mm)								Thick-ness
			D	E	F	G	H	J	K	L	
SHNV20-3V-MP4	1/4 (6.35)	0.125 (3.18)	5.00 (127.00)	2.00 (50.80)	1.00 (25.40)	1.44 (36.57)	2.63 (66.68)	0.38 (9.65)	1.24 (31.50)	0.22 (5.59)	0.75 (19.05)
SHNV20-3V-MP6	3/8 (9.53)	0.219 (5.56)	5.00 (127.00)	2.00 (50.80)	1.00 (25.40)	1.44 (36.57)	2.63 (66.68)	0.38 (9.65)	1.24 (31.50)	0.22 (5.59)	0.75 (19.05)
SHNV20-3V-MP9	9/16 (14.29)	0.312 (7.92)	6.51 (165.59)	2.50 (63.50)	1.25 (31.75)	1.88 (47.75)	3.63 (92.08)	0.50 (12.70)	0.38 (9.65)	0.34 (8.64)	1.00 (25.40)
SHNV20-3V-MP12	3/4 (19.05)	0.438 (11.13)	7.88 (200.03)	3.00 (76.20)	1.63 (41.28)	2.38 (60.45)	4.63 (117.60)	0.63 (16.00)	1.76 (44.70)	0.44 (11.18)	1.38 (35.05)
SHNV20-3V-MP16	1 (25.4)	0.562 (14.27)	9.75 (247.89)	4.12 (104.65)	2.13 (54.10)	3.07 (77.97)	5.88 (149.35)	1.13 (28.70)	2.50 (63.50)	0.56 (14.22)	1.75 (44.45)

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change.


Specifications

Three Way Valves / One Pressure Connection




Part Number	Tube O.D	Orifice	Dimensions, inch(mm)								Thick-ness
			D	E	F	G	H	J	K	L	
SHNV20-4V-MP4	1/4 (6.35)	0.125 (3.18)	4.81 (122.25)	2.00 (50.80)	1.25 (31.75)	1.25 (31.75)	2.44 (61.90)	0.38 (9.65)	1.24 (31.50)	0.22 (5.59)	0.75 (19.05)
SHNV20-4V-MP6	3/8 (9.53)	0.219 (5.56)	4.81 (122.25)	2.00 (50.80)	1.25 (31.75)	1.25 (31.75)	2.44 (61.90)	0.38 (9.65)	1.24 (31.50)	0.22 (5.59)	0.75 (19.05)
SHNV20-4V-MP9	9/16 (14.29)	0.312 (7.92)	6.43 (163.56)	2.50 (63.50)	1.63 (41.40)	1.63 (41.40)	3.38 (85.85)	0.50 (12.70)	1.38 (35.05)	0.34 (8.64)	1.00 (25.40)
SHNV20-4V-MP12	3/4 (19.05)	0.438 (11.13)	7.50 (190.50)	3.00 (76.20)	2.00 (50.80)	2.00 (50.80)	4.25 (107.95)	0.63 (16.00)	1.76 (44.70)	0.44 (11.18)	1.38 (35.05)
SHNV20-4V-MP16	1 (25.4)	0.562 (14.27)	9.00 (228.84)	4.12 (104.65)	2.31 (58.67)	2.31 (58.67)	5.12 (130.05)	1.13 (28.70)	2.50 (63.50)	0.56 (14.22)	1.75 (44.45)

Three Way / Two Stem Connection Valves



Part Number	Tube O.D	Orifice	Dimensions, inch(mm)								Thick-ness
			D	E	F	G	H	J	K	L	
SHNV20-5V-MP4	1/4 (6.35)	0.125 (3.18)	8.13 (206.38)	2.00 (50.80)	1.69 (42.85)	1.00 (25.40)	3.38 (85.73)	0.38 (9.65)	2.62 (66.55)	0.22 (5.59)	0.75 (19.05)
SHNV20-5V-MP6	3/8 (9.53)	0.219 (5.56)	8.13 (206.38)	2.00 (50.80)	1.69 (42.85)	1.00 (25.40)	3.38 (85.73)	0.38 (9.65)	2.62 (66.55)	0.22 (5.59)	0.75 (19.05)
SHNV20-5V-MP9	9/16 (14.29)	0.312 (7.92)	11.31 (287.56)	2.50 (63.50)	2.56 (65.07)	1.63 (41.40)	5.13 (130.18)	0.50 (12.70)	4.13 (104.80)	0.34 (8.64)	1.00 (25.40)
SHNV20-5V-MP12	3/4 (19.05)	0.438 (11.13)	13.00 (330.20)	3.00 (76.20)	3.25 (82.55)	2.00 (50.80)	6.50 (165.10)	0.63 (16.00)	5.24 (133.10)	0.44 (11.18)	1.38 (35.05)
SHNV20-5V-MP16	1 (25.4)	0.562 (14.27)	15.44 (392.42)	4.12 (104.65)	3.75 (95.25)	1.88 (47.75)	7.50 (190.50)	1.13 (28.70)	5.24 (133.10)	0.56 (14.22)	1.75 (44.45)

Replaceable Seat Valves

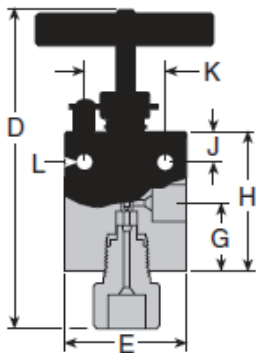

Part Number	Tube O.D	Orifice	Dimensions, inch(mm)							Thick-ness
			D	E	G	H	J	K	L	
SHNV20-6V-MP4	1/4 (6.35)	0.125 (3.18)	5.75 (146.05)	2.00 (50.80)	1.06 (26.92)	2.25 (57.15)	0.38 (9.65)	1.24 (31.50)	0.22 (5.59)	0.75 (19.05)
SHNV20-6V-MP6	3/8 (9.53)	0.219 (5.56)	5.75 (146.05)	2.00 (50.80)	1.06 (26.92)	2.25 (57.15)	0.38 (9.65)	1.24 (31.50)	0.22 (5.59)	0.75 (19.05)
SHNV20-6V-MP9	9/16 (14.29)	0.312 (7.92)	7.34 (186.68)	2.50 (63.50)	1.38 (35.05)	3.13 (79.38)	0.50 (12.70)	1.38 (35.05)	0.34 (8.64)	1.00 (25.40)
SHNV20-6V-MP12	3/4 (19.05)	0.438 (11.13)	9.00 (228.60)	3.00 (76.20)	2.00 (50.80)	4.25 (107.95)	0.63 (16.00)	1.76 (44.70)	0.44 (11.18)	1.38 (35.05)
SHNV20-6V-MP16	1 (25.4)	0.562 (14.27)	11.00 (279.64)	4.12 (104.65)	2.56 (65.02)	5.25 (133.35)	1.13 (28.70)	2.50 (63.50)	0.56 (14.22)	1.75 (44.45)


• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change.

High Pressure Needle Valve

SHNV60 Series - 60,000 psi (4,140 bar)

Features

- Pressures to 60,000 psi (4,140 bar)
- Non-rotating stem tips.
- Available sizes are 1/4", 3/8", 9/16" and 1".
- Type 316 stainless steel high tensile bodies.
- Choice of VEE or Regulating stem tip.
- Packing set consists of multiple Teflon packing with nylon back up.

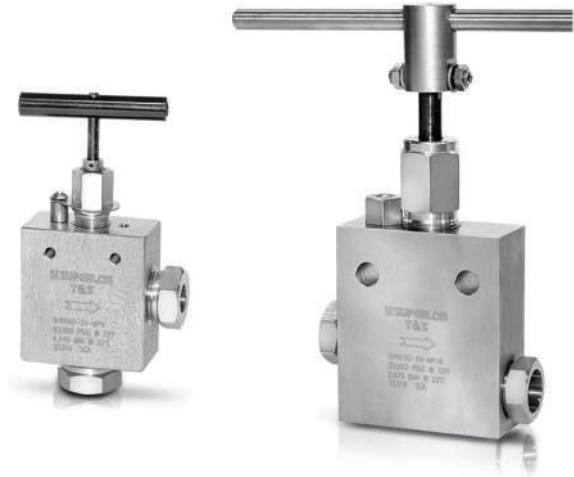

Specifications

- Maximum Working Pressure rating: 60,000psig (4,140bar) @72 F°(22 C°)
- Temperature rating: 0 to 450 F°(-17.8 to 232 C°) with Teflon packing and up to 1200 F°(648 C°) with optional grafoil packing.

Technical Data

Valve Flow Coefficient

Tube O.D In.	Connection	Orifice In. (mm)	*Cv	Pressure / Temperature Rating psi (bar) @72 F°(22 C°)
1/4"	HP4	0.094" (2.39)	0.12	30,000 psi (2,070 bar)
3/8"	HP6	0.125" (3.18)	0.23	30,000 psi (2,070 bar)
9/16"	HP9	0.187" (4.74)	1.33	30,000 psi (2,070 bar)
1"	HP16	0.438" (11.12)	2.80	30,000 psi (2,070 bar)


*Cv values listed are for 2-way straight pattern valves.
For 2-way angle pattern valves, increase Cv value by 50%.

Valve Flow Coefficient


Tube O.D In.	Connection	Orifice In. (mm)	*Cv	Pressure / Temperature Rating psi (bar) @72 F°(22 C°)
9/16"	HP9	0.109" (2.76)	0.28	40,000 psi (2,760 bar)
1/4"	HP4	0.062" (1.57)	0.08	60,000 psi (4,140 bar)
3/8"	HP6	0.062" (1.57)	0.09	60,000 psi (4,140 bar)
9/16"	HP9	0.078" (1.98)	0.14	60,000 psi (4,140 bar)

*Cv values listed are for 2-way straight pattern valves.
For 2-way angle pattern valves, increase Cv value by 50%.

Coefficient Curves (Cv) 30,000psi - 1/4", 3/8", 9/16"

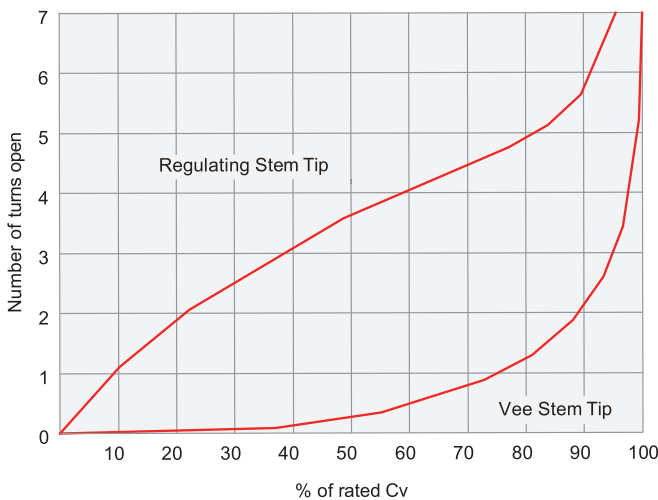


Coefficient Curves (Cv) 30,000psi - 1"

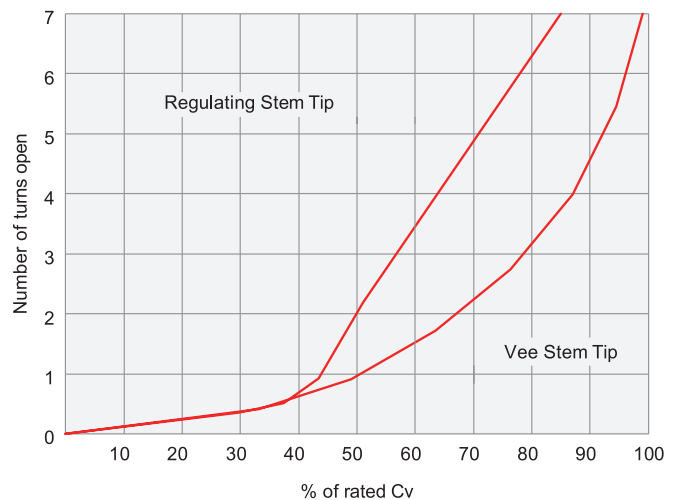


Technical Data

Coefficient Curves (Cv) 40,000psi - 9/16"

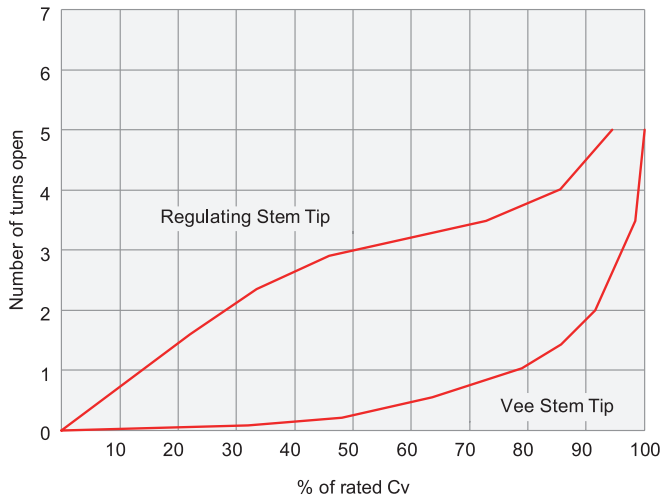

Coefficient Curves (Cv) 60,000psi - 1/4", 3/8", 9/16"

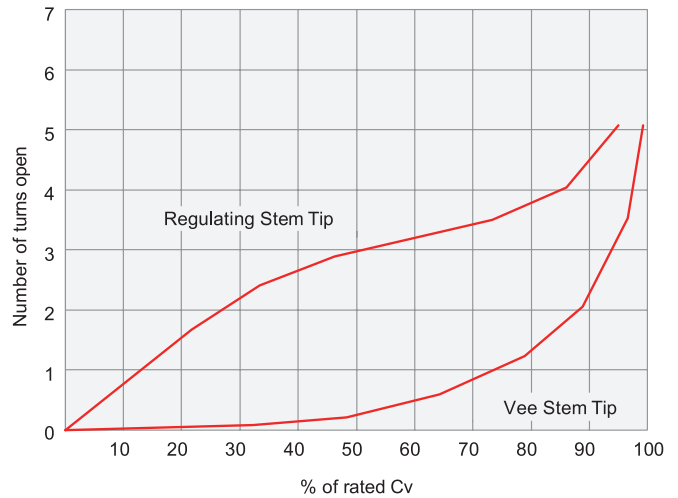

Ordering Information

Example : **SHNV30 - 1V - HP4 - GR - SS**

1
2 3
4
5
6

1. Valve Series

- SHNV30 : 30,000 psi valve
- SHNV40 : 40,000 psi valve
- SHNV60 : 60,000 psi valve

2. Body Pattern

- 1 : 2-way straight
- 2 : 2-way angle
- 3 : 3-way, two pressure connections
- 4 : 3-way, one pressure connection
- 5 : 3-way, two stem connection valve
- 6 : Replaceable seat valve

3. Stem Type

- V : Vee stem
- R : Regulating stem

4. Connection Size & Type

Size (inch)	1/4	3/8	9/16	1
High Pressure	HP4	HP6	HP9	HP16

5. Packing Material


- Nil : PTFE (Standard)
- GR : Grafoil

6. Body Material


- SS : Stainless Steel

Table of dimensions

Two Way Straight Valves



Two Way Angle Valves



Two Way Straight Valves

Part Number	Tube O.D	Orifice	Dimensions, inch(mm)								Thickness
			D	E	F	G	H	J	K	L	
SHNV30-1V-HP4	1/4 (6.35)	0.094 (2.39)	4.62 (117.35)	2.00 (50.80)	0.50 (12.70)	0.88 (22.35)	2.00 (50.80)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV30-1V-HP6	3/8 (9.53)	0.125 (3.18)	4.68 (118.87)	2.00 (50.80)	0.50 (12.70)	0.88 (22.35)	2.00 (50.80)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV30-1V-HP9	9/16 (14.29)	0.187 (4.74)	5.06 (128.52)	2.62 (66.55)	0.88 (22.35)	1.32 (33.52)	2.44 (61.98)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)
SHNV30-1V-HP16	1 (25.4)	0.438 (11.13)	8.42 (213.86)	4.13 (104.90)	0.94 (23.87)	1.69 (42.92)	4.44 (112.77)	1.12 (28.44)	2.50 (63.50)	0.56 (14.22)	1.75 (44.45)
SHNV40-1V-HP9	9/16 (14.29)	0.109 (2.76)	5.06 (128.52)	2.62 (66.55)	0.75 (19.05)	1.19 (30.22)	2.50 (63.50)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)
SHNV60-1V-HP4	1/4 (6.35)	0.062 (1.57)	4.75 (120.65)	2.00 (50.80)	0.43 (10.92)	0.81 (20.57)	2.12 (53.85)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV60-1V-HP6	3/8 (9.53)	0.062 (1.57)	4.87 (123.70)	2.00 (50.80)	0.56 (14.22)	0.94 (23.87)	2.25 (57.15)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV60-1V-HP9	9/16 (14.29)	0.078 (1.98)	5.13 (130.30)	2.62 (66.55)	0.75 (19.05)	1.19 (30.22)	2.50 (63.50)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)


Two Way Angle Valves

Part Number	Tube O.D	Orifice	Dimensions, inch(mm)							Thickness
			D	E	G	H	J	K	L	
SHNV30-2V-HP4	1/4 (6.35)	0.094 (2.39)	4.62 (117.35)	2.00 (50.80)	0.88 (22.35)	2.00 (50.80)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV30-2V-HP6	3/8 (9.53)	0.125 (3.18)	4.74 (120.40)	2.00 (50.80)	1.00 (25.40)	2.12 (53.85)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV30-2V-HP9	9/16 (14.29)	0.187 (4.74)	5.06 (128.52)	2.62 (66.55)	1.32 (33.52)	2.44 (61.98)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)
SHNV30-2V-HP16	1 (25.4)	0.438 (11.13)	9.35 (237.49)	4.13 (104.90)	2.37 (60.20)	5.12 (130.04)	1.12 (28.44)	2.50 (63.50)	0.56 (14.22)	1.75 (44.45)
SHNV40-2V-HP9	9/16 (14.29)	0.109 (2.76)	5.37 (136.40)	2.62 (66.55)	1.50 (38.10)	2.81 (71.37)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)
SHNV60-2V-HP4	1/4 (6.35)	0.062 (1.57)	5.00 (127.00)	2.00 (50.80)	1.07 (27.17)	2.38 (60.45)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV60-2V-HP6	3/8 (9.53)	0.062 (1.57)	5.25 (133.35)	2.00 (50.80)	1.31 (33.27)	2.62 (66.55)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV60-2V-HP9	9/16 (14.29)	0.078 (1.98)	5.44 (138.18)	2.62 (66.55)	1.50 (38.10)	2.81 (71.37)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)


• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change.

Table of dimensions

Three Way Valves / Two Pressure Connections



Three Way Valves / One Pressure Connection



Three Way Valves / Two Pressure Connections

Part Number	Tube O.D	Orifice	Dimensions, inch(mm)								Thickness
			D	E	F	G	H	J	K	L	
SHNV30-3V-HP4	1/4 (6.35)	0.094 (2.39)	4.74 (120.40)	2.00 (50.80)	0.62 (15.74)	1.00 (25.40)	2.12 (53.85)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV30-3V-HP6	3/8 (9.53)	0.125 (3.18)	5.12 (130.05)	2.00 (50.80)	1.00 (25.40)	1.38 (35.05)	2.50 (63.50)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV30-3V-HP9	9/16 (14.29)	0.187 (4.74)	5.49 (139.45)	2.62 (66.55)	1.32 (33.52)	1.76 (44.70)	2.88 (73.15)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)
SHNV30-3V-HP16	1 (25.4)	0.438 (11.13)	9.71 (246.63)	4.13 (104.90)	2.38 (60.45)	2.81 (71.37)	5.56 (141.22)	1.12 (28.44)	2.50 (63.50)	0.56 (14.22)	1.75 (44.45)
SHNV40-3V-HP9	9/16 (14.29)	0.109 (2.76)	6.06 (153.92)	2.62 (66.55)	1.43 (36.32)	1.88 (47.75)	3.31 (84.07)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)
SHNV60-3V-HP4	1/4 (6.35)	0.062 (1.57)	4.74 (120.40)	2.00 (50.80)	0.65 (17.52)	1.07 (27.17)	2.38 (60.45)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV60-3V-HP6	3/8 (9.53)	0.062 (1.57)	4.87 (123.70)	2.00 (50.80)	1.06 (26.92)	1.44 (36.57)	2.75 (69.85)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV60-3V-HP9	9/16 (14.29)	0.078 (1.98)	5.13 (130.30)	2.62 (66.55)	1.28 (32.51)	1.72 (43.68)	3.03 (76.96)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)


Three Way Valves / One Pressure Connection

Part Number	Tube O.D	Orifice	Dimensions, inch(mm)								Thickness
			D	E	F	G	H	J	K	L	
SHNV30-4V-HP4	1/4 (6.35)	0.094 (2.39)	4.62 (117.35)	2.00 (50.80)	0.88 (22.35)	0.88 (22.35)	2.00 (50.80)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV30-4V-HP6	3/8 (9.53)	0.125 (3.18)	4.74 (120.40)	2.00 (50.80)	1.00 (25.40)	1.00 (25.40)	2.12 (53.85)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV30-4V-HP9	9/16 (14.29)	0.187 (4.74)	5.12 (130.05)	2.62 (66.55)	1.32 (33.52)	1.32 (33.52)	2.44 (61.98)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)
SHNV30-4V-HP16	1 (25.4)	0.438 (11.13)	9.35 (237.49)	4.13 (104.90)	2.37 (60.20)	2.37 (60.20)	5.12 (130.04)	1.12 (28.44)	2.50 (63.50)	0.56 (14.22)	1.75 (44.45)
SHNV40-4V-HP9	9/16 (14.29)	0.109 (2.76)	5.37 (136.40)	2.62 (66.55)	1.50 (38.10)	1.50 (38.10)	2.81 (71.37)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)
SHNV60-4V-HP4	1/4 (6.35)	0.062 (1.57)	5.00 (127.00)	2.00 (50.80)	1.07 (27.17)	1.07 (27.17)	2.38 (60.45)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV60-4V-HP6	3/8 (9.53)	0.062 (1.57)	5.25 (133.35)	2.00 (50.80)	1.31 (33.27)	1.31 (33.27)	2.62 (66.55)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV60-4V-HP9	9/16 (14.29)	0.078 (1.98)	5.44 (138.18)	2.62 (66.55)	1.50 (38.10)	1.50 (38.10)	2.81 (71.37)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)


* All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change.

Table of dimensions

Three Way / Two Stem Connection Valves



Replaceable Seat Valves



Three Way / Two Stem Connection Valves

Part Number	Tube O.D	Orifice	Dimensions, inch(mm)								Thickness
			D	E	F	G	H	J	K	L	
SHNV30-5V-HP4	1/4 (6.35)	0.094 (2.39)	5.68 (144.27)	2.00 (50.80)	1.53 (38.86)	1.12 (28.45)	3.06 (77.72)	0.38 (9.65)	2.30 (58.42)	0.22 (5.59)	1.00 (25.40)
SHNV30-5V-HP6	3/8 (9.53)	0.125 (3.18)	5.87 (149.10)	2.00 (50.80)	1.62 (41.27)	1.12 (28.45)	3.25 (82.55)	0.38 (9.65)	2.49 (63.24)	0.22 (5.59)	1.00 (25.40)
SHNV30-5V-HP9	9/16 (14.29)	0.187 (4.74)	6.37 (161.80)	2.62 (66.55)	1.87 (47.62)	1.12 (28.45)	3.75 (95.25)	0.38 (9.65)	2.99 (75.94)	0.28 (7.11)	1.50 (38.10)
SHNV30-5V-HP16	1 (25.4)	0.438 (11.13)	11.81 (299.97)	4.13 (104.90)	3.87 (98.42)	2.75 (69.85)	7.75 (196.85)	1.12 (28.44)	5.51 (139.95)	0.56 (14.22)	1.75 (44.45)
SHNV40-5V-HP9	9/16 (14.29)	0.109 (2.76)	9.12 (231.65)	2.62 (66.55)	2.06 (52.32)	1.31 (33.27)	4.12 (104.65)	0.38 (9.65)	3.36 (85.34)	0.28 (7.11)	1.50 (38.10)
SHNV60-5V-HP4	1/4 (6.35)	0.062 (1.57)	6.07 (154.18)	2.00 (50.80)	1.72 (43.68)	1.31 (33.27)	3.44 (87.38)	0.38 (9.65)	2.68 (68.07)	0.22 (5.59)	1.00 (25.40)
SHNV60-5V-HP6	3/8 (9.53)	0.062 (1.57)	6.37 (161.80)	2.00 (50.80)	1.87 (47.62)	1.31 (33.27)	3.75 (95.25)	0.38 (9.65)	2.99 (75.94)	0.22 (5.59)	1.00 (25.40)
SHNV60-5V-HP9	9/16 (14.29)	0.078 (1.98)	6.37 (161.80)	2.62 (66.55)	2.06 (52.32)	1.31 (33.27)	4.12 (104.65)	0.38 (9.65)	3.36 (85.34)	0.28 (7.11)	1.50 (38.10)

Replaceable Seat Valves

Part Number	Tube O.D	Orifice	Dimensions, inch(mm)							Thickness
			D	E	G	H	J	K	L	
SHNV30-6V-HP4	1/4 (6.35)	0.094 (2.39)	5.80 (147.32)	2.00 (50.80)	1.26 (32.00)	2.38 (60.45)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV30-6V-HP6	3/8 (9.53)	0.125 (3.18)	6.05 (153.67)	2.00 (50.80)	1.26 (32.00)	2.38 (60.45)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV30-6V-HP9	9/16 (14.29)	0.187 (4.74)	6.45 (163.83)	2.62 (66.55)	1.25 (31.75)	2.44 (61.98)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)
SHNV30-6V-HP16	1 (25.4)	0.438 (11.13)	10.56 (268.22)	4.13 (104.90)	2.31 (58.67)	5.12 (130.04)	1.12 (28.44)	2.50 (63.50)	0.56 (14.22)	1.75 (44.45)
SHNV40-6V-HP9	9/16 (14.29)	0.109 (2.76)	6.45 (163.83)	2.62 (66.55)	1.25 (31.75)	2.44 (61.98)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)
SHNV60-6V-HP4	1/4 (6.35)	0.062 (1.57)	6.28 (159.51)	2.00 (50.80)	1.31 (33.27)	2.62 (66.55)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV60-6V-HP6	3/8 (9.53)	0.062 (1.57)	6.52 (165.60)	2.00 (50.80)	1.31 (33.27)	2.62 (66.55)	0.38 (9.65)	1.38 (35.05)	0.22 (5.59)	1.00 (25.40)
SHNV60-6V-HP9	9/16 (14.29)	0.078 (1.98)	6.90 (175.26)	2.62 (66.55)	1.31 (33.27)	2.62 (66.55)	0.38 (9.65)	1.38 (35.05)	0.28 (7.11)	1.50 (38.10)

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change.