



SUPERLOK®

Cryogenic Service Valves

Ball Valves & Globe Valves



Cryogenic Service Applications

Valves are used with cryogenics from production through transportation and storage which serve many industries with gases such as oxygen, nitrogen, argon and more. At extremely low temperatures of cryogenic liquids, many common materials become brittle and can crack. Many materials also shrink, causing potentially leaks at connections.

Therefore, care must be taken when designing equipment and selecting materials to be used with cryogenics.

Moisture must not be allowed to contaminate the valve as it will freeze and expand and cause leakage and abrasive damage to the equipment.

Some of the common gases used are listed below.



Liquefied Gases	Boiling Point		Liquefied Gases	Boiling Point	
	0	0		0	0
Ammonia (NH3)	-64.4	-84	Oxygen (O2)	-183.3	-298
Propane (C3H8)	-76.6	-106	Argon (Ar)	-186.1	-303
Carbon Dioxide (CO2)	-78.5	-109	Air	-194.4	-318
Acetylene (C2H2)	-83.9	-119	Nitrogen (N2)	-195.6	-320
Ethylene (C2H4)	-103.9	-155	Neon (Ne)	-246.1	-411
Methane (CH4)	-161.7	-259	Hydrogen (H2)	-252.8	-423
Natural Gas (LNG)	-167.8	-270	Helium (He)	-268.9	-452

Cryogenic Service Applications

Common Steel will show low temperature brittleness under low temperature.

Therefore, it is a key for design and manufacturing to select suitable body materials according to the lowest working temperature of the cryogenic valve. Refer to the following table for the lowest working temperature of body materials.

The low temperature materials shall be subjected to low temperature impact test according to standard requirements.

For valves with working temperature lower than -100 , the body, bonnet and stem must be subjected to cryogenic treatment after tough machining.

The ball and seat sealing face should be subjected to cryogenic treatment hard alloy spray welding/overlay welding.

Then grinding and assembly can be carried out, so as to ensure the adaptability of materials under low temperature.

In addition, the packing, gasket, bolt and nut shall be made of materials suitable for low temperature service condition.

Forging		Casting	
Material	Minimum Temperature	Material	Minimum Temperature
ASTM A350 LF2	-46°	ASTM A352 LCB	-46°
ASTM A350 LF5	-59°	ASTM A352 LCC	-46°
ASTM A350 LF9	-73°	ASTM A352 LC1	-59°
ASTM A350 LF3	-101°	ASTM A352 LC2	-73°
ASTM A182 F304	-254°	ASTM A352 LC3	-101°
ASTM A182 F316	-254°	ASTM A351 CF8	-254°
ASTM A182 F304L	-254°	ASTM A351 CF8M	-254°
ASTM A182 F316L	-254°	ASTM A351 CF3	-254°
		ASTM A351 CF3M	-254°

Construction - Ball & DBB Valves

Extended bonnets

Gland packing is located away from cold area in cryogenic and low temperature systems. Access to valve operator is easier in lagged high temperature applications. Extended stems allow operation through bulk heads and other obstacles.

Cavity pressure relief

Used for liquid gas service and other applications where body cavity pressure may increase.

[3 possibilities or combinations are available]

- a small hole in the throat of the upstream port, allows the cavity to vent to the upstream side, making the valve unidirectional.
- the hole is fitted with a relief valve for bidirectional operation.
- self relieving seats : the seat design itself was studied to relieve the excess of pressure inside the cavity of the valve.

Locking devices

On manual valves, bolted plates allow all ball valves to be padlocked in the fully open or closed position. On valves with gearboxes, the locking devices are part of the gear. Interlocking systems ensure correct sequencing of any number and combination valves.

Manual or Motor Operated (Pneumatic, Electric or Hydraulic)

Uni- / Bi-Direction

Double Block & Bleed Design

Seat / Sealing materials

From soft materials suitable for temperature down to -196°C (-327°F) to metal seats for aggressive and corrosive process media up to 500°C (932°F) constant temperature.

Construction - Globe & Gate Valves

Seat / Sealing materials

From Soft Materials suitable for temperature down to -196°C (-327°F) to metal seats for aggressive and corrosive media up to 850°C (1562°F) constant temperature.

Extended bonnets

Gland packing is located away from cold area in cryogenic and low temperature systems. Access to valve operator is easier in lagged high temperature applications. Extended stems allow operation through bulkheads and other obstacles.

Cavity pressure Relief

Not needed


Locking devices

A locking device allows all Globe Valves to be padlocked in the fully open or closed position.

Actuated operation

Electric, pneumatic or hydraulic actuators. Actuated valve packages are functionally tested.

Cryogenic Valve Testing

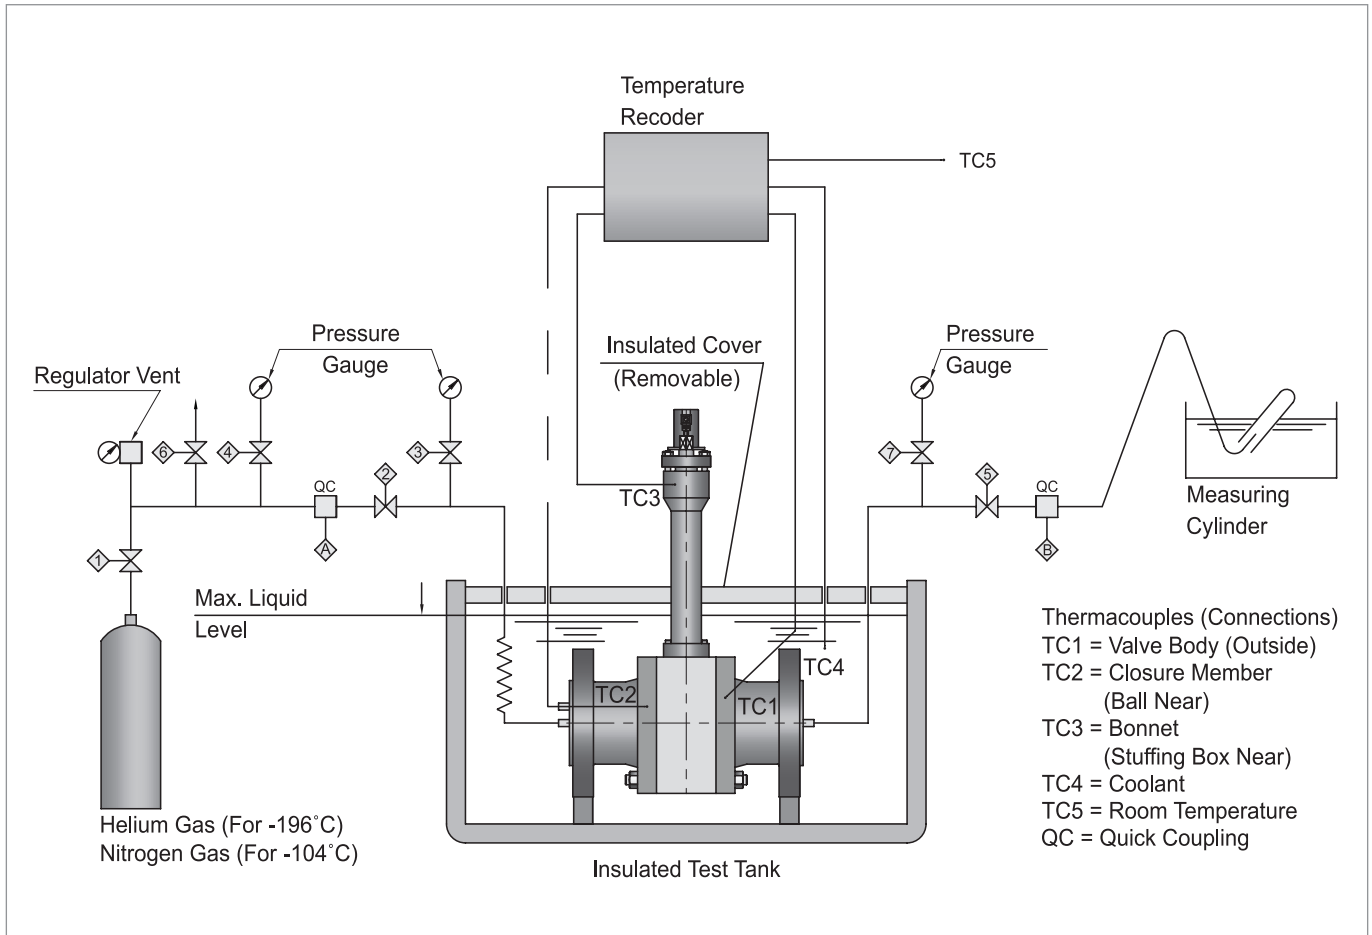

In order to maintain valve reliability BMT has an inhouse testing facility for cryogenic valves to ensure the quality of the valves and their functionality.

These tests include valve leakage, torques and cycling under typical cryogenic conditions.

The tests are carried out in a cryogenic bath or in-line under pressure according to standard requirements of international procedures such as BS6364.

Ball Valve Series

Designed for long life and easy servicing

Specifications

- Valve size : top entry - 1/2~6inch
three piece - 1/2~2inch
- Pressure class : ASME class 150 to class1500
- End connection : butt weld, socket weld, threaded,
flanged or combinations
- Temperature : down to - 196°C
- Bolted extension bonnet
- Anti blow out proof stem
- Fire safety design
- Wall thickness design : ASME B16.34
- Inspection and test : BS6364 , API 598
- End flange dimension : ASME B16.5
- Butt weld end dimension : ASME B16.25
- Socket weld end dimension : ASME B 16.11
- Face to face & end to end : ASME B16.10




Double Block & Bleed Valves


Designed for long life and easy servicing

Specifications

- Valve size : 1/2 ~ 3 inch
- Pressure class : ASME Class 150 to Class 1500
- Valve type : Ball-Ball-Needle, Needle-Needle-Needle
- Bore size : Full bore, Reduced Bore, 10mm, 14mm
- End connection : Flanged-Threaded, Flanged-Flanged
- Temperature : down to -196°C
- Floating & Trunnion ball design
- Bolted extension bonnet
- Anti blow out proof stem
- Fire safety design
- Wall thickness design : ASME B16.34
- Inspection and test : BS 6364, API 598
- End flange dimension : ASME B 16.5
- Face to face & end to end : Manufacture standard

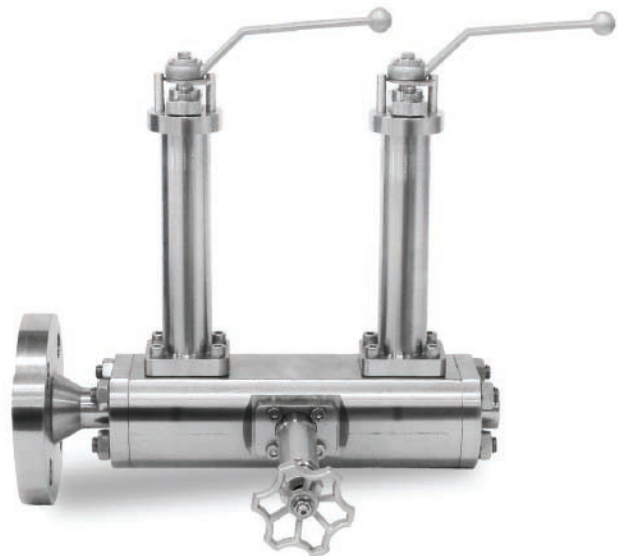

Top Entry Ball Valves

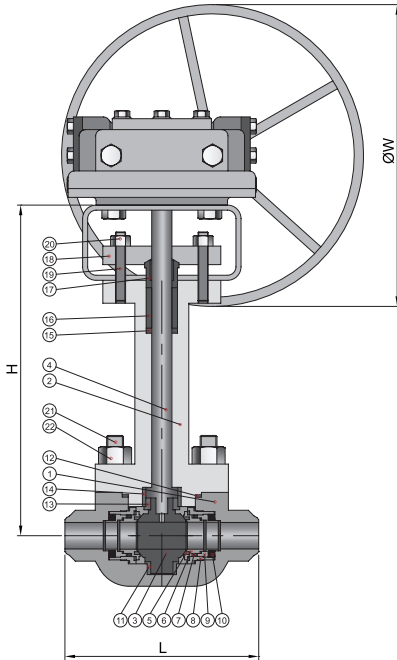

Material of Construction

NO.	PART LIST	MATERIAL
1	BODY	ASTM A351-CF8M
2	BONNET	ASTM A351-CF8M
3	BALL	ASTM A351-CF8M
4	STEM	ASTM A276-316
5	SEAT	PCTFE
6	SEAT RETAINER	ASTM A276-316
7	U-CUP SEAL	VIRGIN PTFE+SS316
8	SEAT HOLDER	ASTM A276-316
9	BACK UP SEAT RING	ASTM A276-316
10	SPRING	INCONEL X-750
11	BOTTOM THRUST WASHER	PCTFE
12	GASKET	GRAPHITE+SS316
13	UPPER THRUST WASHER	PCTFE
14	TURUST BEARING	PCTFE
15	STEM WASHER	ASTM A276-316
16	PACKING	GRAPHITE
17	GLAND	ASTM A276-316
18	GLAND FLANGE	ASTM A276-316
19	FLANGE BOLT	ASTM A193-B8M
20	FLANGE BOLT NUT	ASTM A194-8M
21	BONNET BOLT	ASTM A193-B8M
22	BONNET BOLT NUT	ASTM A194-8M

Table of Dimensions

Class 150

Size		Dimensions				Weight, kg	
DN	NPS	L		H	W	Weight, kg	
		BW	FLG			BW	FLG
15	1/2	108	108	300	190	4.3	5.2
20	3/4	117	117	300	190	5.7	7.1
25	1	127	127	352	230	8.6	10.4
40	1-1/2	165	165	400	300	12.9	16
50	2	178	178	434	350	15	20
65	2-1/2	190	190	550	350	20	23
80	3	203	203	561	350	36	45
100	4	229	229	600	350	61	73
150	6	394	394	1073	350	213	249

Class 300


Size		Dimensions				Weight, kg	
DN	NPS	L		H	W	Weight, kg	
		BW	FLG			BW	FLG
15	1/2	140	140	300	190	4.3	5.5
20	3/4	152	152	300	190	5.7	8.2
25	1	165	165	352	230	8.6	11.6
40	1-1/2	190	190	400	450	12.9	15.9
50	2	216	216	434	450	16	22
65	2-1/2	241	241	550	450	25	31
80	3	283	283	560	450	43	54
100	4	305	305	612	450	80	100
150	6	403	403	1073	450	227	272

Class 600

Size		Dimensions				Weight, kg	
DN	NPS	L		H	W	Weight, kg	
		BW	FLG			BW	FLG
15	1/2	165	165	300	230	6	7.8
20	3/4	191	191	300	230	6	9
25	1	216	216	352	450	12	15.7
40	1-1/2	241	241	400	450	25	32.1
50	2	292	292	434	450	43	54
65	2-1/2	330	330	550	450	55	62
80	3	356	356	600	450	66	82
100	4	432	432	710	450	102	145
150	6	559	559	1163	450	254	318

• All dimensions in millimeters unless specified as "inch".
Dimension are for reference only, subject to change.

3-Piece Ball Valves

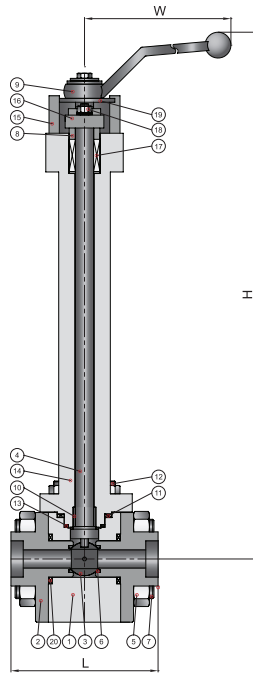

Material of Construction

NO.	DESCRIPTION	MATERIAL
1	BODY	ASTM A182-F316
2	BODY CAP	ASTM A182-F316
3	BALL	ASTM A276-316
4	STEM	ASTM A276-316
5	BODY BOLT NUT	ASTM A194-8M
6	BALL SEAT	PCTFE
7	BODY BOLT	ASTM A193-B8M
8	PACKING GLAND	ASTM A276-316
9	BAR HANDLE	A351 CF8M
10	BUSHING	PCTFE
11	GASKET	GRAPHITE
12	BONNET BOLT / NUT	ASTM A193-B8M/A194-8M
13	BONNET SEAL	PCTFE
14	BONNET	ASTM A182-F316
15	STOP PIN	SS 316
16	BONNET FLANGE	ASTM A276-316
17	PACKING	GRAPHITE
18	STUD BOLT / NUT	ASTM A193-B8M/A194-8M
19	LOCKING DEVICE	SS 316
20	GASKET	GRAPHITE
21	NAME PLATE	STAINLESS STEEL

Table of Dimensions

Class 150, 300

Size		Dimensions			Weight kg
DN	NPS	L SW	H	W	
15	1/2	107	313	190	3.7
20	3/4	107	313	190	3.7
25	1	125	326	230	5.2
32	1-1/4	150	349	260	10.3
40	1-1/2	150	349	260	10.3
50	2	180	370	260	17.1

Class 600

Size		Dimensions			Weight kg
DN	NPS	L SW	H	W	
15	1/2	107	313	190	3.7
20	3/4	107	313	190	3.7
25	1	125	326	230	5.2
32	1-1/4	150	349	260	10.3
40	1-1/2	150	349	260	10.3
50	2	180	370	260	17.1

Class 800

Size		Dimensions			Weight kg
DN	NPS	L SW	H	W	
15	1/2	107	313	190	3.7
20	3/4	107	313	190	3.7
25	1	125	326	230	5.2
32	1-1/4	150	349	260	10.3
40	1-1/2	150	349	260	10.3
50	2	180	370	260	17.1

Class 900

Size		Dimensions			Weight kg
DN	NPS	L SW	H	W	
15	1/2	167	326	230	7.3
20	3/4	167	326	230	7.3
25	1	185	342	230	10.6
32	1-1/4	210	360	260	19.1
40	1-1/2	210	360	260	19.1

Class 1500

Size		Dimensions			Weight kg
DN	NPS	L SW	H	W	
15	1/2	167	326	230	7.3
20	3/4	167	326	230	7.3
25	1	185	342	230	10.6
32	1-1/4	210	360	260	19.1
40	1-1/2	210	360	260	19.1

* All dimensions in millimeters unless specified as "inch".
Dimension are for reference only, subject to change.

Globe Valve Series

Designed for long life and easy servicing

Specifications

- Valve size : 1/2~6inch
- Pressure class : ASME class 150 to class 600
- End connection : butt weld, socket weld, threaded, flanged or combinations
- Temperature : -196°C to 850°C (-327°F to 1562°F)
- Standard inclusion of a back seat facility for ease of maintenance.
- Bolted extension bonnet
- Inside or outside screw stem & fire safety design
- Non rotating and self aligning stem disc construction
- Metal seat to bubble tight shut-off design
- Wall thickness design : ASME B16.34
- Inspection and test : BS6364 , API 598
- End flange dimension : ASME B16.5
- Butt weld end dimension : ASME B16.25
- Face to face & end to end : ASME B16.10



Gate Valve Series


Designed for long life and easy servicing

Specifications

- Valve size : 1/2~ 6 inch
- Pressure class : ASME class 150 to class 600
- End connection : socket weld, threaded
- Temperature : -196°C to 850°C (-327°F to 1562°F)
- Standard inclusion of a back seat facility for ease of maintenance.
- Bolted extension bonnet
- Inside or outside screw stem
- Non rotating and self aligning stem disc construction
- Metal seat to bubble tight shut-off design
- Wall thickness design : ASME B16.34
- Inspection and test : BS6364 , API 598
- Socket weld end dimension : ASME B16.11
- Face to face & end to end : ASME B16.10



Globe Valves

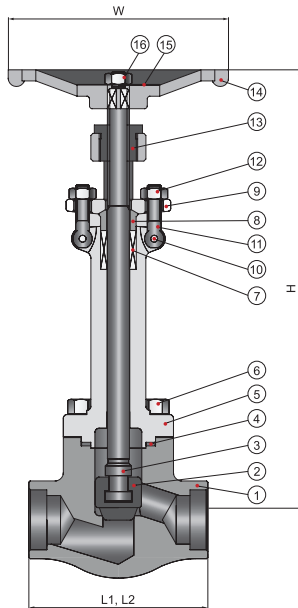

Material of Construction

NO.	DESCRIPTION	MATERIAL
1	BODY	ASTM A182-F316
2	DISC	ASTM A276-316
3	STEM	ASTM A276-316
4	GASKET	GRAPHITE
5	BONNET	ASTM A182-F316
6	BONNET BOLT	ASTM A193-B8M
7	GLAND PACKING	GRAPHITE
8	GLAND	ASTM A276-316
9	GLAND FLANGE	ASTM A182-F316
10	EYE BOLT PIN	ASTM A276-304
11	EYE BOLT	ASTM A193-B8M
12	EYE BOLT NUT	ASTM A194-8M
13	SLEEVE	ASTM A276-316
14	HAND WHEEL	A351 CF8M
15	NAME PLATE	ALUMINIUM
16	WHEEL NUT	ASTM A194-8M

Construction

Seat / Sealing materials :

From soft materials suitable for temperature down to -196°C (-327°F) to metal seats for aggressive and corrosive process media up to 850°C(1562°F) constant temperature.

Extended bonnets :

- Gland packing is located away from cold area in cryogenic and low temperature systems.
- Access to valve operator is easier in lagged high temperature applications
- Extended stems allow operation through bulkheads and other obstacles

Cavity pressure Relief :

Not needed

Locking devices :

A locking device allows all Globe valves to be padlocked in the fully open or closed position.

Actuated operation :

- Electric , pneumatic or hydraulic actuators.
- Actuated valve packages are functionally tested.

Table of Dimensions

Forged Steel Globe Valves - Class 150

Size		Dimensions				Weight, kg	
DN	NPS	SW	FLG	H	W	SW	FLG
15	1/2	79	108	466	100	4.3	8.7
20	3/4	92	117	466	100	5.7	9.1
25	1	111	127	503	125	8.6	12.3
32	1-1/4	152	165	606	160	12.9	16.2
40	1-1/2	152	165	606	160	12.6	-
50	2	172	203	657	180	21.3	24.4

Cast Steel Globe Valves - Class 150

Size		Dimensions				Weight, kg	
DN	NPS	BW/FLG	RTJ	H	W	BW	FLG/RTJ
65	2-1/2	216	229	750	200	27	32
80	3	241	254	760	224	37	42
100	4	292	305	810	250	50	55
125	5	356	368	920	250	50	55
150	6	406	419	973	315	81	86

Forged Steel Globe Valves - Class 300

Size		Dimensions				Weight, kg	
DN	NPS	SW	FLG	H	W	SW	FLG
15	1/2	79	152	466	100	4.3	8.8
20	3/4	92	178	466	100	5.7	9.4
25	1	111	203	503	125	8.6	12.7
32	1-1/4	152	216	606	160	12.9	17.0
40	1-1/2	152	229	606	160	12.6	17.1
50	2	172	267	657	180	21.3	25.5

Cast Steel Globe Valves - Class 300

Size		Dimensions				Weight, kg	
DN	NPS	BW/FLG	RTJ	H	W	BW	FLG/RTJ
65	2-1/2	292	308	750	200	35	40
80	3	318	333	760	224	65	70
100	4	356	371	810	250	80	85
125	5	400	416	920	280	100	105
150	6	445	460	973	315	200	205

Forged Steel Globe Valves - Class 600


Size		Dimensions				Weight, kg	
DN	NPS	SW	FLG	H	W	SW	FLG
15	1/2	79	165	466	100	4.3	9.4
20	3/4	92	191	466	100	5.7	10.1
25	1	111	216	503	125	8.6	14.0
32	1-1/4	152	229	606	160	12.9	18.1
40	1-1/2	152	241	606	160	12.6	18.4
50	2	172	292	657	180	21.3	26.6

Cast Steel Globe Valves - Class 600

Size		Dimensions				Weight, kg	
DN	NPS	BW/FLG	RTJ	H	W	BW	FLG/RTJ
65	2-1/2	330	333	800	224	50	55
80	3	356	359	840	250	72	75
100	4	432	435	1010	315	127	132
150	6	559	562	1160	400	295	310

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change.

Gate Valves

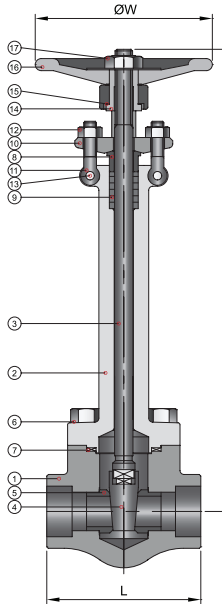

Material of Construction

NO.	DESCRIPTION	MATERIAL
1	BODY	ASTM A182-F316
2	BONNET	ASTM A182-F316
3	STEM	ASTM A276-316
4	WEDGE	ASTM A276-316
5	SEAT RING	ASTM A276-316
6	BONNET BOLT	ASTM A193-B8
7	GASKET	GRAPHITE
8	GLAND	ASTM A276-316
9	GLAND PACKING	GRAPHITE
10	GLAND FLANGE	ASTM A182-F316
11	GLAND BOLT	ASTM A193-B8
12	GLAND BOLT NUT	ASTM A194-8
13	GLAND BOLT PIN	ASTM A276-304
14	SLEEVE	ASTM A276-410
15	SLEEVE WASHER	ASTM A276-304
16	HAND WHEEL	ASTM A47
17	HAND WHEEL NUT	ASTM A194-8

Construction

Seat / Sealing materials :

From soft materials suitable for temperature down to $-196^{\circ}\text{C}(-327^{\circ}\text{F})$ to metal seats for aggressive and corrosive process media up to $850^{\circ}\text{C}(1562^{\circ}\text{F})$ constant temperature.

Extended bonnets :

- Gland packing is located away from cold area in cryogenic and low temperature systems.
- Access to valve operator is easier in lagged high temperature applications
- Extended stems allow operation through bulkheads and other obstacles

Locking devices :

A locking device allows all Globe valves to be padlocked in the fully open or closed position.

Actuated operation :

- Electric , pneumatic or hydraulic actuators.
- Actuated valve packages are functionally tested.

Table of Dimensions

Forged Steel Gate Valves - Class 150

Size		Dimensions				Weight, kg	
DN	NPS	L		H	W	SW	FLG
		SW	FLG				
15	1/2	79	108	428	100	4.2	8.7
20	3/4	92	117	428	100	5.3	9.1
25	1	111	127	467	125	8.3	12.3
32	1-1/4	120	165	571	160	11.7	16.2
40	1-1/2	120	165	571	160	11.5	-
50	2	140	178	605	180	18.9	24.4

Cast Steel Gate Valves - Class 150

Size		Dimensions				Weight, kg	
DN	NPS	L		H	W	BW	FLG/RTJ
		BW	FLG/RTJ				
65	2-1/2	191	203	700	224	23	28
80	3	203	216	735	224	34	39
100	4	229	241	800	224	48	53
125	5	254	267	915	260	67	72
150	6	267	279	1073	300	85	90

Forged Steel Gate Valves - Class 300

Size		Dimensions				Weight, kg	
DN	NPS	L		H	W	SW	FLG
		SW	FLG				
15	1/2	79	108	428	100	4.2	8.9
20	3/4	92	117	428	100	5.3	9.5
25	1	111	127	467	125	8.3	12.8
32	1-1/4	120	165	571	160	11.7	17.1
40	1-1/2	120	165	571	160	11.5	17.2
50	2	140	178	605	180	18.9	25.4

Cast Steel Gate Valves - Class 300

Size		Dimensions				Weight, kg	
DN	NPS	L		H	W	BW	FLG/RTJ
		BW	FLG/RTJ				
65	2-1/2	241	257	720	224	42	49
80	3	282	298	750	224	45	52
100	4	305	321	812	224	82	92
125	5	381	397	960	260	205	215
150	6	403	419	1273	300	205	215

Forged Steel Gate Valves - Class 600

Size		Dimensions				Weight, kg	
DN	NPS	L		H	W	SW	FLG
		SW	FLG				
15	1/2	79	165	428	100	4.2	9.2
20	3/4	92	190	428	100	5.3	9.9
25	1	111	216	467	125	8.3	13.8
32	1-1/4	120	229	571	160	11.7	17.9
40	1-1/2	120	241	571	160	11.5	18.2
50	2	140	292	605	180	18.9	26.4

Cast Steel Gate Valves - Class 600

Size		Dimensions				Weight, kg	
DN	NPS	L		H	W	BW	FLG/RTJ
		BW	FLG/RTJ				
65	2-1/2	330	333	720	224	58	63
80	3	356	359	765	260	63	68
100	4	432	435	910	300	134	139
150	6	559	562	1363	400	310	315

• All dimensions in millimeters unless specified as "inch". Dimension are for reference only, subject to change.

Ordering Information

Example 1: **FCB3 C RF 1 - 16 - G (-SS)**

1
2
3
4
5
6
7

Example 2: **FCGB C 8S RF 2 - 16 - 36L**

1
2
3
3
4
5
7

Example 3: **FCGT A SW FN 2 - 8 - 36L**

1
2
3
3
4
5
7

1. Cryogenic Valve

Valve	Ball Valve 1-Piece Top Entry	Ball 3-Piece Side Entry	Globe	Gate
Designation	FCB1	FCB3	FCGB	FCGT

2. Pressure Rating

Class	150	300	600	900	1500	2500
Designation	A	B	C	D	E	F

3. End Connection

Flange	Raised Face		Ring Joint		Flat Face	
Designation	RF		RJ		FF	
Butt Weld	Sch10S	Sch20S	Sch40S	Sch80S	Sch160	SchXXS
Designation	1S	2S	4S	8S	16	DS
Type	Socket Weld	Male NPT	Male PT	Female NPT	Female PT	
Designation	SW	MN	MR	FN	FR	

4. Bore

Bore	Full Bore	Reduced Bore	Double Reduced Bore
Designation	1	2	3

5. Size

Size	1/2"	3/4"	1"	1-1/4"	1-1/2"	2"	2-1/2"	3"	4"	5"	6"
Designation	8	12	16	20	24	32	40	48	64	80	96

6. Option

Option	Gear Actuator
Designation	G

7. Material

Material	A182-F316 / A351-CF8M	A182-F316L / A351-CF3M
Designation	Blank	36L



Cryogenic Service Valves