
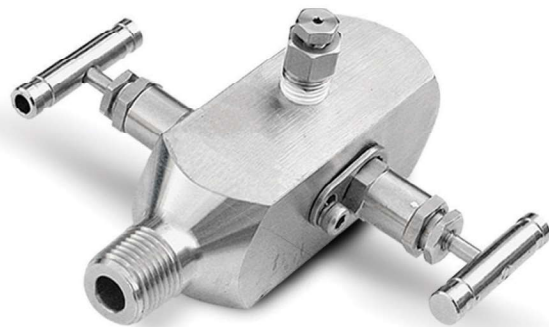


# Instrumentation Gauge Valves

## SGBV / SGBV2 Series

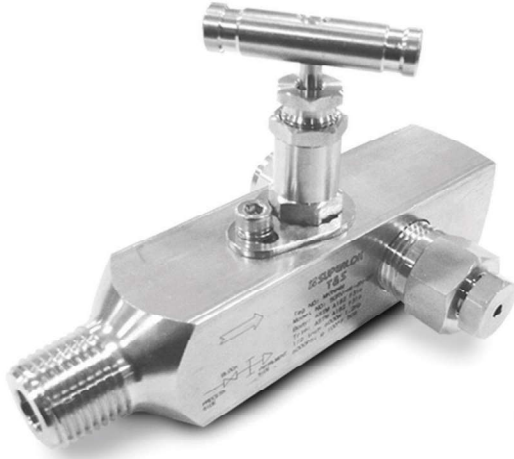

### Features

- Stainless Steel construction.
- 1/2 in. and 3/4 in, male to 1/2 in. female end connections.
- 1/2 in. female gauge ports standard.

### Specifications

Maximum Working Pressure Rating	6000 psig (413 bar) @100°F(38°C)
Temperature Rating	-65 to 450°F (-54 to 232 °C) with PTFE packing
Body Material	316 Stainless Steel
Orifice	0.125" (3.2mm), 0.250" (6.4mm)

### Testing

- Each Valve is tested with nitrogen at 1000psig(69bar) to maximum allowable leak rate of 0.1 SCCM.
- Hydrostatic shell test is performed at 1.5 times of the working pressure. (OPTION)

### Ordering Information

Example : **SGBV - M 8N - F 8N - SS**

1
2
3
2 3
4

#### 1. Valve Series

SGBV : Gauge  
 SGRV : Gauge Root Valve  
 SGBV2 : Gauge 2- Vale

#### 2. End Connection Type

M : Male Pipe Thread  
 F : Female Pipe Thread

#### 3. Port Size

Pipe Thread Designation

Size (inch)	1/2	3/4
Screwed NPT	8N	12N
Screwed BSPT	8R	12R


#### 4. Body Material

SS : 316 Stainless Steel


# Gauge Valve

## Gauge / Root Valve

### SGBV(Gauge Valve)

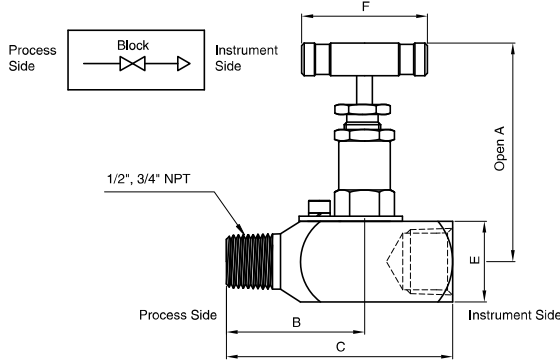


### SGRV(Gauge Root Valve)

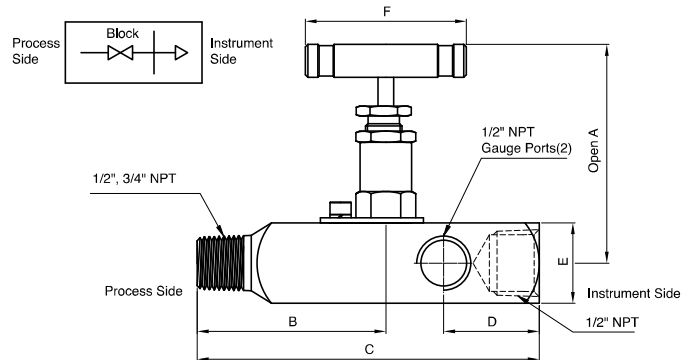

Part Number	End Connections		Dimensions (mm)					
	Process	Instrument	A	B	C	D	E	F
SGBV-M8N-F8N	1/2" Male NPT	1/2" Female NPT	87.0	54.0	90.0	-	32.0	45.0
SGBV-M12N-F8N	3/4" Male NPT	1/2" Female NPT						
SGRV-M8N-F8N	Male NPT	1/2" Female NPT	87.0	75.0	136.0	38.1	32.0	45.0
SGRV-M12N-F8N	3/4" Male NPT	1/2" Female NPT						

# Gauge 2-Valve

## SGBV 2

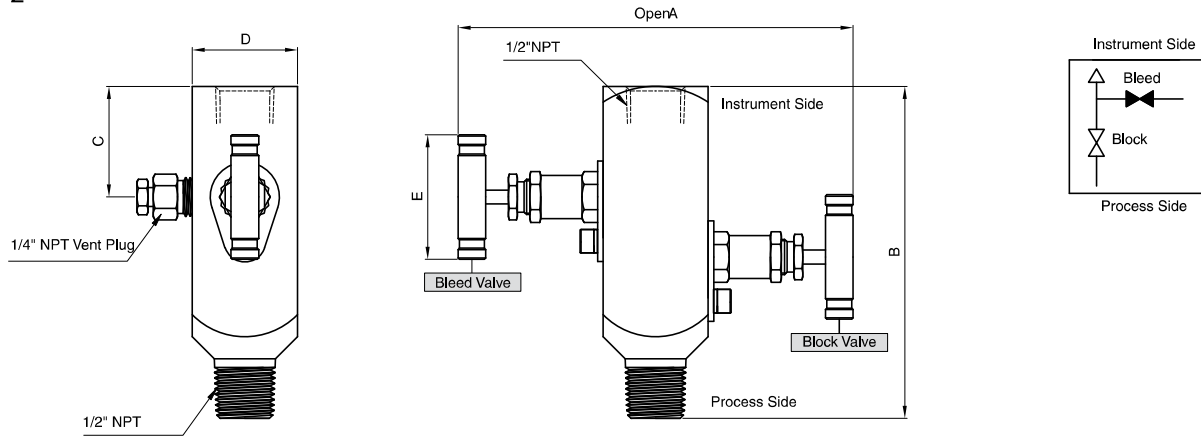

Part Number	End Connections		Dimensions (mm)				
	Process	Instrument	A	B	C	D	E
SGBV2-M8N-F8N	1/2" Male NPT	1/2" Female NPT	142	120	40	38	45

- All dimensions in millimeters unless specified as "inch". Dimension are for reference only and are subject to change.
- To order a manifold with optional Grafoil packing, add-G to the manifold ordering number.